

INSTRUCTION SHEET

Z1-E/ADJUSTABLE



Unit 2, The IO Centre | Tel. 020 8492 7633
Hearle Way, Hatfield | Fax. 020 8492 0333
AL10 9EW | E-mail. info@ecoledlight.co.uk

GENERAL INFORMATION

Featuring the same LED array as the Z1-F, this recessed LED down light has a die-cast powder coated aluminium body and deep cone reflector for anti-glare. With 345° rotation and 20° tilt available, the Z1-E is the perfect adjustable companion to the fixed version.

IMPORTANT INFORMATION

ecoLED recommends that installation should only be carried out by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control.

ESSENTIAL ADVICE

ISOLATE ELECTRICAL SUPPLY BEFORE COMMENCING WORK.
DO NOT SWITCH ON UNTIL ALL CONNECTIONS HAVE BEEN MADE AND PROPERLY CHECKED

FITTING INSTRUCTIONS

- ① Cut an 86mm hole in the ceiling ensuring adequate minimum ceiling void (125mm) without infringing on joists, water pipes or cables.
- ② Make sure there is at least 50mm free air ventilation around the fitting.
- ③ Connect mains supply to the constant current driver. (Blue – Neutral / Brown – Live)
No earth is required, if an earth wire is present, ensure it is fully insulated and cannot contact live or neutral terminals.
- ④ When ready to fit the Z1-E connect the (Red - Positive[⊕]) and (Black - Negative[⊖]) wires to the DC output terminal of the driver.

- ⑤ Bend the sprung legs back, slide the driver into the ceiling followed by the Z1-E, and ensure it is secure.

- ⑥ Do not fit into new plaster or freshly painted area's until completely dry.


- ⑦ Remember to ensure that all units are connected before switching on the power or you may severely damage the LEDs.

PRODUCT SPECIFICATIONS




The Z1-E is not suitable for covering with insulation materials.

PRODUCT DIMENSIONS

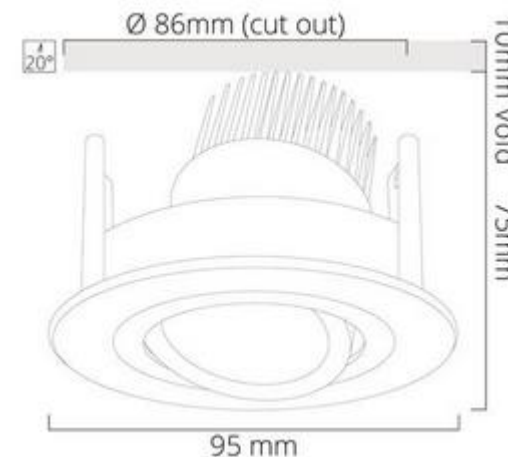

INSTALLATION DIAGRAM

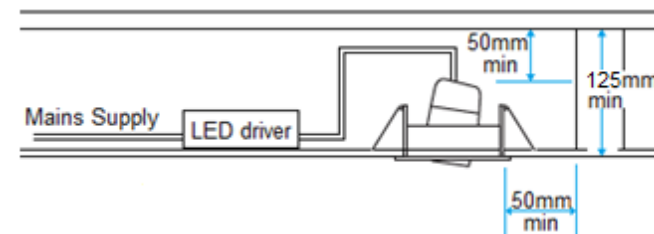

GUARANTEE

The guarantee is invalid if the luminaire is improperly used installed or tampered with. Installed in an improper working environment or does not comply with current IEE wiring regulations.

Should this luminaire fail within the guarantee period it will be replaced free of charge, subject to conditions above and return of the faulty unit.

ecoLED does not accept responsibility for any installation costs associated with the replacement of this luminaire. ecoLED reserve the right to alter specifications without prior notice.

ecoLED does not accept any responsibility for claims arising from poor installation.